

## ROCK SOFT-D



# KAYA ROPES

## UPGRADE YOUR LINES!

205 ROCK SOFT-D



## APPLICATIONS

GENOA SHEET  
SPI SHEET  
GENNAKER TACK-LINE

## SPECIFICATIONS


MATERIAL	BLENDED DYNEEMA® SK 78-POLYESTER STAPLE FIBER
SPECIFIC GRAVITY	0,99-1,20 KG/DM <sup>3</sup>
CONSTRUCTION	8 PLAITED (HOLLOW BRAID)
UV RESISTANCE	EXCELLENT
CHEMICAL RESISTANCE	GOOD
MELTING POINT	147°C
CRITICAL TEMPERATURE	65°C
WORKING STRETCH	<2%
FIBER WATER ABSORPTION	APPROX. %0-1
WET ABRASION	GOOD
DRY ABRASION	GOOD
STANDARD	-
LENGTH	100-200 M PLASTIC SPOOL OR COIL

OTHER COLOURS & LARGER DIAMETERS UPON REQUEST



ART.NO	DIA (Ø)	WEIGHT (kg/100 m)	B.LOAD (kgf)*
205	3	1,00	550
205	4	1,15	800
205	5	1,50	900
205	6	3,00	1.650
205	8	3,70	2.350
205	10	5,85	3.700

\*UNSPliced BREAK LOAD (ALL TESTS ARE IN ACCORDANCE WITH ISO 2307)

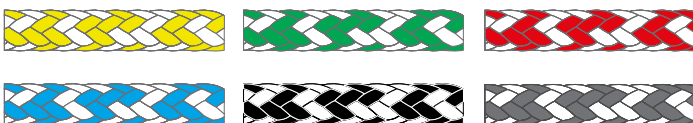

## BENEFITS / FEATURES

VERY SUITABLE FOR JAMMERS  
COMFORTABLE HANDLING  
LOW STRETCH  
LIGHTWEIGHT  
EXCELLENT DINGHY SHEET  
HIGH KNOTTED STRENGTH

Dyneema®

