

## GP ROCK D®



# KAYA ROPES

## UPGRADE YOUR LINES!



112 GP ROCK D®

113 GP ROCK D® MIX

## APPLICATIONS

MAIN HALYARD  
GENOA HALYARD  
SPI HALYARD  
REEFING LINES  
MAIN SHEET  
GENOA SHEET  
SPI SHEET  
SPI GUYS

## SPECIFICATIONS


MATERIAL	COVER: HT POLYESTER FIBER INNER COVER: - CORE: COATED DYNEEMA® SK 78
SPECIFIC GRAVITY	0,99-1,20 KG/DM <sup>3</sup>
CONSTRUCTION	COVER: 24-32 PLAITED CORE: 12 PLAITED
UV RESISTANCE	EXCELLENT
CHEMICAL RESISTANCE	GOOD
MELTING POINT	147°C-256°C
CRITICAL TEMPERATURE	65°C
WORKING STRETCH	<1,5%
FIBER WATER ABSORPTION	APPROX. %0-1
WET ABRASION	GOOD
DRY ABRASION	GOOD
STANDARD	-
LENGTH	100-200 M PLASTIC/WOODEN SPOOL OR COIL

OTHER COLOURS & LARGER DIAMETERS UPON REQUEST



ART.NO	DIA	WEIGHT	B.LOAD
	(Ø)	(kg/100 m)	(kgf)*
112-113	8	5,15	4.250
112-113	10	7,10	6.300
112-113	12	10,00	9.000
112-113	14	13,25	12.000
112-113	16	17,15	15.300
112-113	18	21,05	19.000
112-113	20	25,70	23.000
112-113	22	28,65	26.500
112-113	24	33,80	30.500

\*UNSPLICED BREAK LOAD (ALL TESTS ARE IN ACCORDANCE WITH ISO 2307)

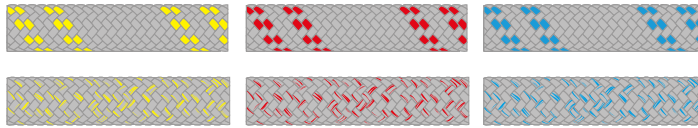

## BENEFITS / FEATURES

GOOD PERFORMANCE IN JAMMERS  
LOW STRETCH  
EASY TO SPLICE

Dyneema®

