


VECT K®

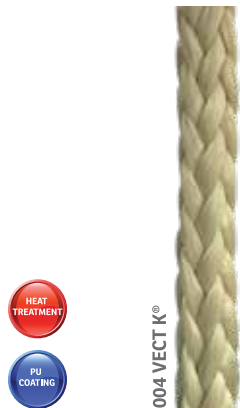

Vectran

**BENEFITS / FEATURES**

NO CREEP UNDER CONSTANT LOADS  
 HIGH BREAKING LOAD  
 EXTREMELY LOW STRETCH  
 PERFECT FOR STATIC APPLICATIONS  
 EASY TO SPLICE  
 PU COATING FOR IMPROVED PROTECTION  
 AGAINST ABRASION

**APPLICATIONS**

LEECH LINE

**SPECIFICATIONS**

<b>MATERIAL</b>	COATED VECTRAN® FIBER
<b>SPECIFIC GRAVITY</b>	1,40 KG/DM <sup>3</sup>
<b>CONSTRUCTION</b>	12 STRAND BRAIDED
<b>UV RESISTANCE</b>	POOR
<b>CHEMICAL RESISTANCE</b>	EXCELLENT
<b>MELTING POINT</b>	300°C
<b>CRITICAL TEMPERATURE</b>	200°C
<b>WORKING STRETCH</b>	<1%
<b>FIBER WATER ABSORPTION</b>	APPROX. %1
<b>WET ABRASION</b>	EXCELLENT
<b>DRY ABRASION</b>	EXCELLENT
<b>LENGTH</b>	100-200 M PLASTIC SPOOL

**OTHER COLOURS & LARGER DIAMETERS UPON REQUEST**

ART.NO	DIA (Ø)	WEIGHT (kg/100 m)	B.LOAD (kgf)*
004	3	0,85	800
004	4	1,45	1.500
004	5	2,30	2.000
004	6	3,15	3.000
004	8	5,70	5.000

**\*UNSPliced BREAK LOAD (ALL TESTS ARE IN ACCORDANCE WITH ISO 2307)**

# KAYA ROPES

## UPGRADE YOUR LINES!

