

LUPES® LS TIGHT



KAYA ROPES

UPGRADE YOUR LINES!

307 LUPES® LS TIGHT



APPLICATIONS

MAIN HALYARD
GENOA HALYARD
SPI HALYARD
REEFING LINES
MAIN SHEET
GENOA SHEET
SPI SHEET

SPECIFICATIONS


MATERIAL	COVER: HT POLYESTER FIBER INNER COVER: - CORE: COATED HT POLYESTER FIBER
SPECIFIC GRAVITY	1,38 KG/DM ³
CONSTRUCTION	COVER: 32 PLAITED CORE: 12 PLAITED
UV RESISTANCE	EXCELLENT
CHEMICAL RESISTANCE	GOOD
MELTING POINT	256°C
CRITICAL TEMPERATURE	170°C
WORKING STRETCH	<4%
FIBER WATER ABSORPTION	APPROX. %1-2
WET ABRASION	GOOD
DRY ABRASION	GOOD
STANDARD	ISO 10547
LENGTH	100-200 M PLASTIC/WOODEN SPOOL OR COIL

OTHER COLOURS & LARGER DIAMETERS UPON REQUEST



ART.NO	DIA (Ø)	WEIGHT (kg/100 m)	B.LOAD (kgf)*
307	6	3,10	1.200
307	8	5,30	1.700
307	10	8,35	2.560
307	12	11,10	3.600
307	14	15,30	4.800
307	16	19,45	6.500
307	18	25,45	8.200
307	20	30,50	10.000
307	22	37,90	12.000
307	24	44,40	14.250

***UNSPliced BREAK LOAD (ALL TESTS ARE IN ACCORDANCE WITH ISO 2307)**

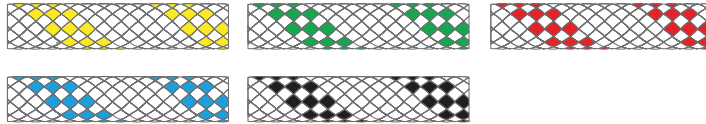

BENEFITS / FEATURES

EASY HANDLING
DURABLE
VERY LONG SERVICE LIFE
HIGH BREAKING LOAD
SHARES THE LOAD EQUALLY BETWEEN
COVER AND CORE
STRETCHES LESS THAN THE STANDARD
POLYESTER

