


## LUPA® ROUND SINGLE LEG MOORING PENDANT


**KAYA  
ROPES**
**UPGRADE  
YOUR  
LINES!**

EYE PROTECTION

EYE PROTECTION

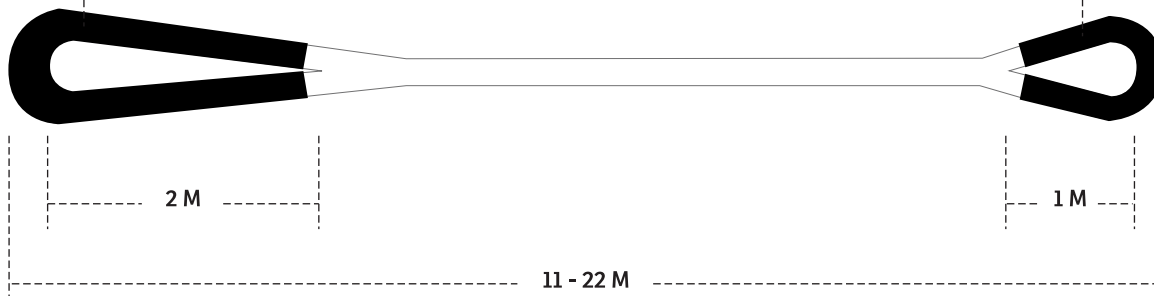

STANDARD SINGLE LEG PENDANTS HAVE A 2 METER SOFT EYE ON ONE END AND A 1 METER SOFT EYE ON THE OTHER END.



## SPECIFICATIONS


MATERIAL	100% HT POLYAMIDE FIBER
TYPE	T
SPECIFIC GRAVITY	1,14 KG/DM <sup>3</sup>
CONSTRUCTION	12 STRAND BRAIDED
UV RESISTANCE	VERY GOOD
CHEMICAL RESISTANCE	GOOD
MELTING POINT	218°C
CRITICAL TEMPERATURE	130°C
ELONGATION AT BREAK	APPROX. %30-35
FIBER WATER ABSORPTION	APPROX. %3-4
WET ABRASION	SUFFICIENT
DRY ABRASION	GOOD
COLOUR	BLACK - WHITE - NAVY BLUE
STANDARD	EN ISO 1140
LENGTH	UPON REQUEST

OTHER COLOURS & LARGER DIAMETERS UPON REQUEST

ART.NO	DIA (mm) (Ø)	WEIGHT (kg / 100 m)	MINIMUM B.LOAD *(kgf)	
			UNSPLICED	SPLICED
416	40	98,70	34.000	30.600
416	48	142,00	48.000	43.200
416	56	193,00	68.000	61.200
416	64	253,00	84.500	76.050
416	72	320,00	110.000	99.000
416	80	395,00	129.000	116.100
416	88	478,00	152.000	136.800
416	96	569,00	183.000	164.700

\*UNSPLICED BREAK LOAD (ALL TESTS ARE IN ACCORDANCE WITH ISO 2307)

PER OCIMF GUIDELINES, POLYAMIDE MOORING PENDANTS SHOULD HAVE A 37% HIGHER MINIMUM BREAKING STRENGTH THAN THE MOORING LINE. IT IS RECOMMENDED TO RETIRE MOORING PENDANTS AFTER 18 MONTHS OF USE, OR PRIOR TO RESIDUAL MONTHS OF USE, OR PRIOR TO RESIDUAL STRENGTH REDUCTION TO 60% OF THE ORIGINAL MINIMUM BREAKING STRENGTH.



## BENEFITS / FEATURES

- HIGH STRENGTH
- EXCELLENT SHOCK ABSORPTION
- HIGH STRETCH
- DURABLE
- SOFT HAND
- DOES NOT KINK
- EASY TO SPLICE

