

STORM D PRO®



KAYA ROPES

UPGRADE YOUR LINES!

302-372 STORM D PRO® 78/99



312-382 STORM D PRO® MIX 78/99



APPLICATIONS

MAIN HALYARD
GENOA HALYARD
SPI HALYARD
REEFING LINES
MAIN SHEET
GENOA SHEET
SPI SHEET
SPI GUYS

SPECIFICATIONS


MATERIAL	COVER: HT POLYESTER FIBER INNER COVER: - CORE: COATED DYNEEMA® SK 78/99
SPECIFIC GRAVITY	0,99-1,20 KG/DM ³
CONSTRUCTION	COVER: 24-32 PLAITED CORE: 12 PLAITED
UV RESISTANCE	EXCELLENT
CHEMICAL RESISTANCE	GOOD
MELTING POINT	147°C-256°C
CRITICAL TEMPERATURE	65°C
WORKING STRETCH	<1,5%
FIBER WATER ABSORPTION	APPROX. %0-1
WET ABRASION	GOOD
DRY ABRASION	GOOD
STANDARD	-
LENGTH	100-200 M PLASTIC/WOODEN SPOOL OR COIL

OTHER COLOURS & LARGER DIAMETERS UPON REQUEST



ART.NO	DIA	WEIGHT (kg/100 m)	B.LOAD (kgf)*	
	(Ø)		SK78 (ART.NO: 302-312)	SK99 (ART.NO: 372-382)
302-312-372-382	8	4,60	3.600	4.300
302-312-372-382	10	6,35	5.650	6.700
302-312-372-382	12	8,95	8.000	9.600
302-312-372-382	14	11,75	10.400	12.500
302-312-372-382	16	15,50	14.000	16.750
302-312-372-382	18	19,75	18.000	21.500
302-312-372-382	20	24,00	22.000	26.400
302-312-372-382	22	26,80	25.000	30.000
302-312-372-382	24	31,75	29.000	34.750

*UNSPliced BREAK LOAD (ALL TESTS ARE IN ACCORDANCE WITH ISO 2307)

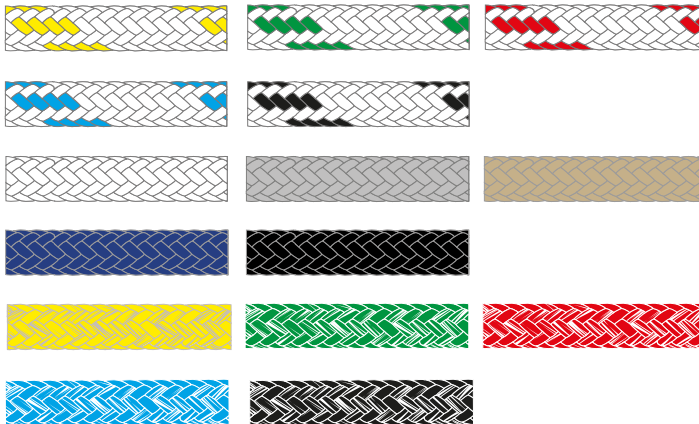

BENEFITS / FEATURES

GOOD PERFORMANCE IN JAMMERS
EXCELLENT BREAKING LOAD (SK99)
LOW STRETCH
EASY TO SPLICE

