


LUPA® ROUND GROMMET MOORING PENDANT



KAYA ROPES

UPGRADE YOUR LINES!

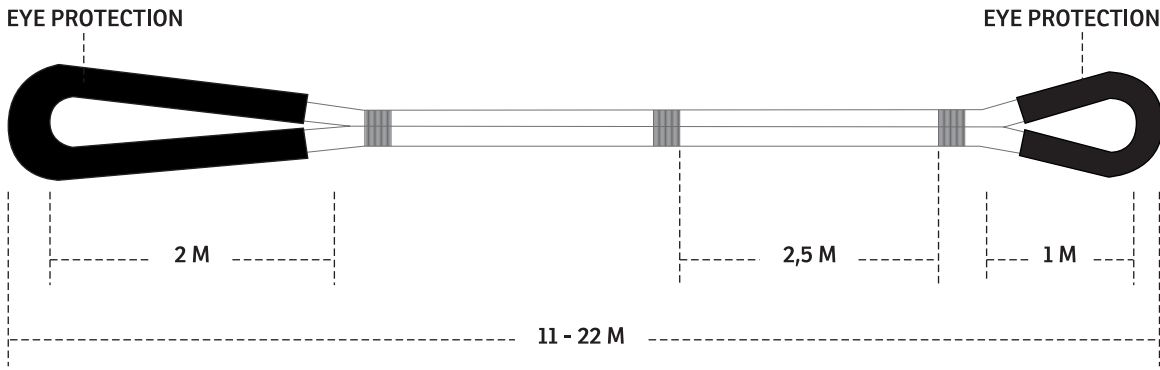

STANDARD GROMMET PENDANTS HAVE A 2 METER SOFT EYE ON ONE END AND A 1 METER SOFT EYE ON THE OTHER END.
GROMMET STRENGTH IS 1.6x THE SINGLE LEG ROPE STRENGTH.



SPECIFICATIONS


MATERIAL	100% HT POLYAMIDE FIBER
TYPE	T
SPECIFIC GRAVITY	1,14 KG/DM ³
CONSTRUCTION	12 STRAND BRAIDED
UV RESISTANCE	VERY GOOD
CHEMICAL RESISTANCE	GOOD
MELTING POINT	218°C
CRITICAL TEMPERATURE	130°C
ELONGATION AT BREAK	APPROX. %30-35
FIBER WATER ABSORPTION	APPROX. %3-4
WET ABRASION	SUFFICIENT
DRY ABRASION	GOOD
COLOUR	BLACK - WHITE - NAVY BLUE
STANDARD	EN ISO 1140
LENGTH	UPON REQUEST

OTHER COLOURS & LARGER DIAMETERS UPON REQUEST

ART.NO	DIA (mm) (Ø)	MINIMUM B.LOAD *(kgf)
		SPLICED
516	32	30.420
516	36	39.600
516	40	48.960
516	48	69.120
516	56	97.920
516	64	121.680
516	72	158.400
516	80	185.760

*SPLICED BREAK LOAD (ALL TESTS ARE IN ACCORDANCE WITH ISO 2307)

PER OCIMF GUIDELINES, POLYAMIDE MOORING PENDANTS SHOULD HAVE A 37% HIGHER MINIMUM BREAKING STRENGTH THAN THE MOORING LINE. IT IS RECOMMENDED TO RETIRE MOORING PENDANTS AFTER 18 MONTHS OF USE, OR PRIOR TO RESIDUAL MONTHS OF USE, OR PRIOR TO RESIDUAL STRENGTH REDUCTION TO 60% OF THE ORIGINAL MINIMUM BREAKING STRENGTH.



BENEFITS / FEATURES

- HIGH STRENGTH
- EXCELLENT SHOCK ABSORPTION
- HIGH STRETCH
- DURABLE
- SOFT HAND
- DOES NOT KINK
- EASY TO SPLICE

