


DYNE K® SINGLE LEG TUG PENDANT



EYE PROTECTION

EYE PROTECTION

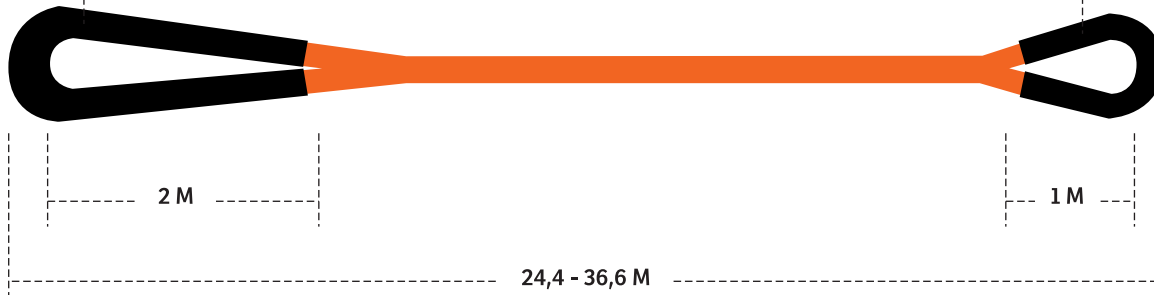

STANDARD SINGLE LEG PENDANTS HAVE A 2 METER SOFT EYE ON ONE END AND A 1 METER SOFT EYE ON THE OTHER END.
1 METER EYE IS FOR MATING TO THE MAINLINE AND A 2 METER SOFT EYE IS FOR THE SHIPBOARD CONNECTION.

**KAYA
ROPES**
**UPGRADE
YOUR
LINES!**



SPECIFICATIONS


MATERIAL	COATED DYNEEMA® SK 75/78
SPECIFIC GRAVITY	0,97 KG/DM ³
CONSTRUCTION	12 STRAND BRAIDED
UV RESISTANCE	EXCELLENT
CHEMICAL RESISTANCE	EXCELLENT
MELTING POINT	147°C
CRITICAL TEMPERATURE	65°C
WORKING STRETCH	<1%
FIBER WATER ABSORPTION	NONE
WET ABRASION	EXCELLENT
DRY ABRASION	EXCELLENT
STANDARD	ISO 10325
LENGTH	UPON REQUEST

OTHER COLOURS & LARGER DIAMETERS UPON REQUEST

ART.NO	DIA (mm) (Ø)	WEIGHT** (kg / 100 m)	MINIMUM B.LOAD *(kgf)	
			UNSPLICED	SPLICED
125	28	44,50	69.360	61.000
125	32	57,50	88.740	79.560
125	36	72,00	106.080	95.880
125	40	88,10	128.520	115.260
125	44	106,00	148.920	133.620
125	48	125,00	173.400	156.060
125	52	146,00	201.000	180.540
125	56	169,00	230.520	207.060
125	60	193,00	258.060	232.560
125	64	220,00	289.680	261.120
125	72	278,00	359.040	323.340

*BREAK LOAD (ALL TESTS ARE IN ACCORDANCE WITH ISO 2307)

**THE WEIGHT MAY VARY AROUND ±5 DUE TO SPECIAL COATING



BENEFITS / FEATURES

SUPERIOR ABRASION RESISTANCE
EXCELLENT BREAKING LOAD
BUOYANT
DURABLE
VERY LOW STRETCH
LIGHTWEIGHT
EASY TO SPLICE
DOES NOT KINK



Dyneema®

