


DYNE K® GROMMET TUG PENDANT




EYE PROTECTION

EYE PROTECTION

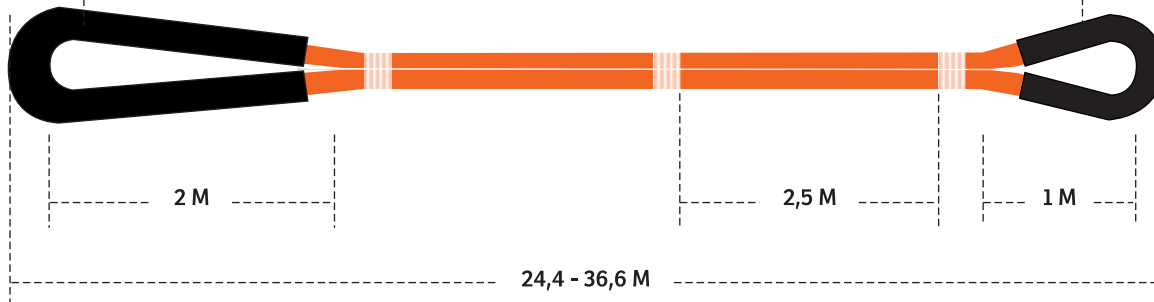

STANDARD GROMMET PENDANTS HAVE A 2 METER SOFT EYE ON ONE END AND A 1 METER SOFT EYE ON THE OTHER END.
 1 METER EYE IS FOR MATING TO THE MAINLINE AND A 2 METER SOFT EYE IS FOR THE SHIPBOARD CONNECTION.
 GROMMET STRENGTH IS 1.6x THE SINGLE LEG ROPE STRENGTH.



SPECIFICATIONS

MATERIAL	COATED DYNEEMA® SK 75/78
SPECIFIC GRAVITY	0,97 KG/DM ³
CONSTRUCTION	12 STRAND BRAIDED
UV RESISTANCE	EXCELLENT
CHEMICAL RESISTANCE	EXCELLENT
MELTING POINT	147°C
CRITICAL TEMPERATURE	65°C
WORKING STRETCH	<1%
FIBER WATER ABSORPTION	NONE
WET ABRASION	EXCELLENT
DRY ABRASION	EXCELLENT
STANDARD	ISO 10325
LENGTH	UPON REQUEST

OTHER COLOURS & LARGER DIAMETERS UPON REQUEST

ART.NO	DIA (mm)	MINIMUM B.LOAD *(kgf)
	(Ø)	SPLICED
225	24	75.200
225	26	86.400
225	28	97.600
225	32	127.296
225	36	153.408
225	40	184.416
225	44	213.792
225	48	249.696
225	52	288.864
225	56	331.296
225	60	372.096

*SPLICED BREAK LOAD (ALL TESTS ARE IN ACCORDANCE WITH ISO 2307)

BENEFITS / FEATURES

SUPERIOR ABRASION RESISTANCE
 EXCELLENT BREAKING LOAD
 BUOYANT
 DURABLE
 VERY LOW STRETCH
 LIGHTWEIGHT
 EASY TO SPLICE
 DOES NOT KINK

