

## LUPES® LS TIGHT



# KAYA ROPES

## UPGRADE YOUR LINES!

307 LUPES® LS TIGHT



### APPLICATIONS

MAIN HALYARD  
GENOA HALYARD  
SPI HALYARD  
REEFING LINES  
MAIN SHEET  
GENOA SHEET  
SPI SHEET


### SPECIFICATIONS

MATERIAL	COVER : HT POLYESTER FIBER
	INNER COVER : -
SPECIFIC GRAVITY	CORE : COATED HT POLYESTER FIBER
	1,38 KG/DM <sup>3</sup>
CONSTRUCTION	COVER : 32 PLAITED
	CORE : 12 - 16 PLAITED
UV RESISTANCE	EXCELLENT
CHEMICAL RESISTANCE	GOOD
MELTING POINT	256°C
CRITICAL TEMPERATURE	170°C
WORKING STRETCH	<4%
FIBER WATER ABSORPTION	APPROX. %1-2
WET ABRASION	GOOD
DRY ABRASION	GOOD
STANDARD	ISO 10547
LENGTH	100-200 M ORANGE SPOOL OR COIL

OTHER COLOURS & LARGER DIAMETERS UPON REQUEST

ART.NO	DIA (Ø)	WEIGHT (kg / 100 m)	B.LOAD (kgf)*
307	6	2,87	1.200
307	8	5,10	1.700
307	10	7,97	2.560
307	12	11,50	3.600
307	14	15,60	4.800
307	16	20,40	6.500
307	18	25,80	8.200
307	20	31,90	10.000

\*UNSPliced BREAK LOAD (ALL TESTS ARE IN ACCORDANCE WITH ISO 2307)

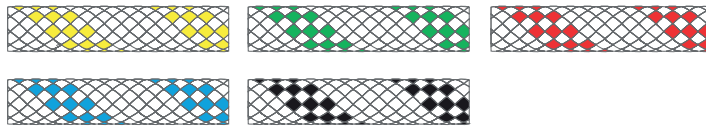

### BENEFITS / FEATURES

EASY HANDLING  
HIGH BREAKING LOAD  
EASY TO SPLICE  
DOES NOT KINK  
SHARES THE LOAD EQUALLY BETWEEN  
COVER AND CORE  
STRETCHES LESS THAN THE STANDARD  
POLYESTER

