

LUPES® PLAIN TIGHT



KAYA ROPES

UPGRADE YOUR LINES!

306 LUPES® PLAIN TIGHT



APPLICATIONS

MAIN SHEET
GENOA SHEET
SPI SHEET
SPI GUYS
SPI POLE UPHAUL
GENOVA CAR TRAVELLER
MAIN CAR TRAVELLER

SPECIFICATIONS


MATERIAL	COVER: HT POLYESTER FIBER INNER COVER: - CORE: HT POLYESTER FIBER
SPECIFIC GRAVITY	1,38 KG/DM ³
CONSTRUCTION	COVER: 32 PLAITED CORE: 12 PLAITED
UV RESISTANCE	EXCELLENT
CHEMICAL RESISTANCE	GOOD
MELTING POINT	256°C
CRITICAL TEMPERATURE	170°C
WORKING STRETCH	<6%
FIBER WATER ABSORPTION	APPROX. %1-2
WET ABRASION	GOOD
DRY ABRASION	GOOD
STANDARD	ISO 10547
LENGTH	100-200 M PLASTIC/WOODEN SPOOL OR COIL

OTHER COLOURS & LARGER DIAMETERS UPON REQUEST



ART.NO	DIA (Ø)	WEIGHT (kg/100 m)	B.LOAD (kgf)*
306	6	3,15	1.080
306	8	5,30	1.550
306	10	8,45	2.330
306	12	11,25	3.270
306	14	15,45	4.370
306	16	19,65	5.630
306	18	25,70	7.000
306	20	30,85	8.600
306	22	38,25	10.300
306	24	44,80	13.100

*UNSPliced BREAK LOAD (ALL TESTS ARE IN ACCORDANCE WITH ISO 2307)

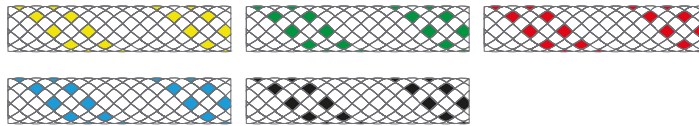

BENEFITS / FEATURES

OUTSTANDING FLEXIBILITY
EASY HANDLING
GREAT VALUE FOR MONEY
DURABLE
VERY LONG SERVICE LIFE

