

STORM D PRO® MIX TP



KAYA ROPES

UPGRADE YOUR LINES!

362-365 STORM D PRO® MIX TP 78/99



APPLICATIONS

MAIN HALYARD
GENOA HALYARD
SPI HALYARD
REEFING LINES
MAIN SHEET
GENOA SHEET
SPI SHEET
SPI GUYS

SPECIFICATIONS


MATERIAL	COVER: %50 TECHNORA® FIBER %50 HIGH TENACITY POLYESTER FIBER CORE: COATED DYNEEMA® SK 78/99
SPECIFIC GRAVITY	0,99-1,20 KG/DM ³
CONSTRUCTION	COVER: 24-32 PLAITED CORE: 12 PLAITED
UV RESISTANCE	SUFFICIENT
CHEMICAL RESISTANCE	EXCELLENT
MELTING POINT	147°C-256°C
CRITICAL TEMPERATURE	65°C
WORKING STRETCH	<1,5%
FIBER WATER ABSORPTION	APPROX. %1-2
WET ABRASION	EXCELLENT
DRY ABRASION	EXCELLENT
STANDARD	-
LENGTH	100-200 M PLASTIC/WOODEN SPOOL OR COIL

OTHER COLOURS & LARGER DIAMETERS UPON REQUEST



ART.NO	DIA (Ø)	WEIGHT (kg/100 m)	B.LOAD (kgf)*	
			TP78 (ART.NO: 362)	TP99 (ART.NO: 365)
362-365	8	4,25	3.600	4.300
362-365	10	6,40	5.650	6.700
362-365	12	8,95	8.000	9.600
362-365	14	11,80	10.400	12.500
362-365	16	15,55	14.000	16.750
362-365	18	19,35	18.000	21.500
362-365	20	23,35	22.000	26.400
362-365	22	26,20	25.000	30.000
362-365	24	31,85	29.000	34.750

*UNSPliced BREAK LOAD (ALL TESTS ARE IN ACCORDANCE WITH ISO 2307)

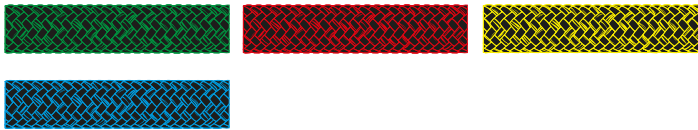

BENEFITS / FEATURES

GOOD GRIP ON WINCHES
VERY GOOD PERFORMANCE IN JAMMERS
EXCELLENT BREAKING LOAD (SK99)
VERY GOOD HEAT RESISTANCE
LOW STRETCH
EASY TO SPLICE

