

LUPES® PLAIN



KAYA ROPES

UPGRADE YOUR LINES!




APPLICATIONS

MAIN SHEET
 GENOA SHEET
 SPI SHEET
 SPI GUYS
 SPI POLE UPHOUL
 GENOVA CAR TRAVELLER
 MAIN CAR TRAVELLER

SPECIFICATIONS


MATERIAL	COVER: HT POLYESTER FIBER INNER COVER: - CORE: HT POLYESTER FIBER
SPECIFIC GRAVITY	1,38 KG/DM ³
CONSTRUCTION	COVER: 24-32 PLAITED CORE: 12 PLAITED
UV RESISTANCE	EXCELLENT
CHEMICAL RESISTANCE	GOOD
MELTING POINT	256°C
CRITICAL TEMPERATURE	170°C
WORKING STRETCH	<6%
FIBER WATER ABSORPTION	APPROX. %1-2
WET ABRASION	GOOD
DRY ABRASION	GOOD
STANDARD	ISO 10547
LENGTH	100-200 M PLASTIC/WOODEN SPOOL OR COIL

OTHER COLOURS & LARGER DIAMETERS UPON REQUEST



ART.NO	DIA (Ø)	WEIGHT (kg/100 m)	B.LOAD (kgf)*
206	6	3,15	1.080
206	8	5,30	1.550
206	10	8,20	2.330
206	12	11,45	3.270
206	14	15,45	4.370
206	16	19,65	5.630
206	18	25,70	7.000
206	20	31,30	8.600
206	22	38,25	10.300
206	24	44,80	13.100

*UNSPliced BREAK LOAD (ALL TESTS ARE IN ACCORDANCE WITH ISO 2307)

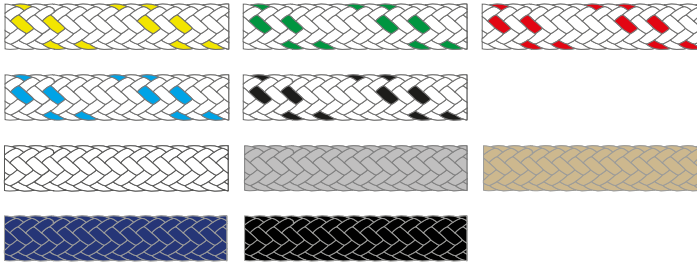

BENEFITS / FEATURES

OUTSTANDING FLEXIBILITY
 EASY TO SPLICE
 GREAT VALUE FOR MONEY
 DURABLE
 VERY LONG SERVICE LIFE

